

PHILIPS



With compliments

Helmut Singer Elektronik

www.helmut-singer.de info@helmut-singer.de


fon +49 241 155 315 fax +49 241 152 066

Feldchen 16-24 D-52070 Aachen Germany

SHUNT

PM 9244

9447 092 440.1

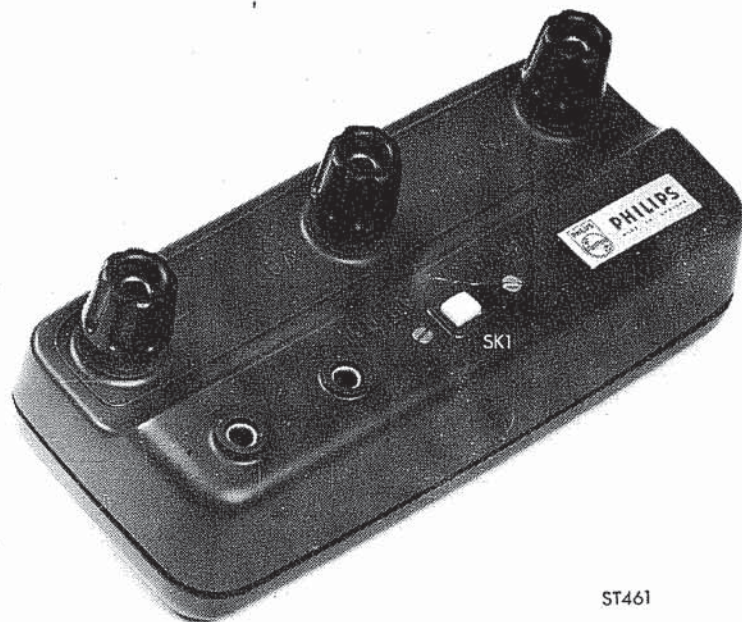

ST461

Technical data:

Current ranges	10 A and 31.6 A DC or AC 1 kHz
Output voltage	Max. 100 mV or max. 31.6 mV in both ranges. Adaptable by switch 100 mV/31.6 mV
Accuracy	Range 100 mV ± 1 % Range 31.6 mV ± 2 %
Dissipation	3.16 Watt
Voltage with respect to earth	≤ 400 V AC
Dimensions	140 x 65 x 55 mm

Technische Daten

Strombereiche	10 A und 31,6 A, Gleich- oder Wechselspannung 1 kHz
Ausgangsspannung	Max. 100 mV oder max. 31,6 V in beiden Bereichen Mit Schalter 100 mV/31,6 mV wählbar
Messfehler	100 mV Bereich: ± 1 % 31,6 mV Bereich: ± 2 %
Verbrauch	3,16 W
Spannung gegenüber Erde	≤ 400 VAC
Abmessungen	140 x 65 x 55 mm

Caractéristiques techniques

Gammes de courant	10 A et 31,6 A, tension continue ou alternative 1 kHz
Tension de sortie	100 mV max. ou 31,6 mV dans les deux gammes. Réglable avec le commutateur 100 mV/31,6 mV.
Précision	dans la gamme 100 mV: ± 1 % dans la gamme 31,6 mV: ± 2 %
Puissance	3,16 W
Tension par rapport à la terre	≤ 400 VAC
Dimensions	140 x 65 x 55 mm